

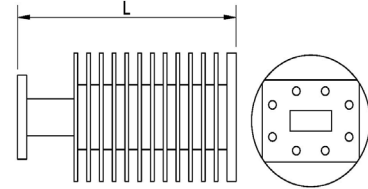


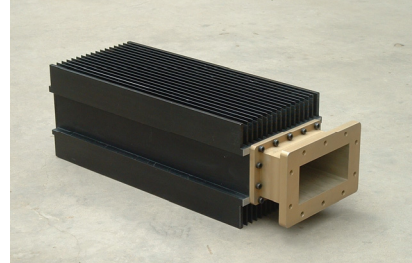

波导大功率负载 Waveguide High Power Load



型号 P/N	频率 Frequency GHz	带宽 Bandwidth MHz	驻波系数 V.S.W.R	平均功率 Mean Power W	峰值功率 Peak Power KW	法兰盘 型号 flange	冷却方式 Coolant	重量 Weight kg	L×W×H mm	重量 Weight kg
L322-100	1.7~2.6	400	1.1	100	30	FDP-22	air		L=500	
L322-1000	1.7~2.6	200	1.1	1000	50	FDP-22	air		500×200×200	
L326-100	2.17~3.3	500	1.1	100	30	FDP-26	air		L=460	
L326-500	2.17~3.3	200	1.1	500	50	FDP-26	air	8.5	460×160×160	
L326-1000	2.17~3.3	200	1.1	1000	50	FDP-26	air		460×160×160	
L332-100	2.6~3.95	600	1.1	100	30	FDP-32	air		L=250	
L332-1000	2.6~3.95	300	1.1	1000	50	FDP-32	air		Φ160×250	
L348-100	3.95~5.85	1000	1.1	100	30	FDP-48	air		L=220	
L348-1000	3.95~5.85	500	1.1	500	100	FDP-48	air		Φ150×320	
L358-50	4.7~7.05	1000	1.1	50	30	FDP-58	air		L=180	
L358-500	4.7~7.05	500	1.1	500	50	FDP-58	air		Φ120×200	
L370-50	5.85~8.2	2000	1.1	50	10	FDP-70	air		L=150	
L370-500	5.85~8.2	1000	1.1	500	50	FDP-70	air		Φ120×250	
L384-50	7.05~10	2000	1.1	50	10	FBP-84	air		Φ90×120	
L384-300	7.05~10	1000	1.1	300	30	FBP-84	air		Φ90×200	
L3100-50	8.2~12.4	2000	1.1	50	10	FBP-100	air		Φ90×120	
L3100-300	8.2~12.4	1000	1.1	300	30	FBP-100	air		Φ90×120	
L3120-10	10~15	3000	1.1	10	5	FBP-120	air		L=100	
L3120-100	10~15	1500	1.1	100	10	FBP-120	air		Φ90×160	
L3140-10	12.4~18	3000	1.1	10	5	FBP-140	air		L=100	
L3140-100	12.4~18	1500	1.1	100	10	FBP-140	air		Φ80×140	
L3140-500	12.4~18	1500	1.2	500	10	FBP-140	air		Φ130×330	
L3220-10	18~26.5	3000	1.1	10	5	FBP-220	air		L=80	
L3220-50	18~26.5	1500	1.1	50	5	FBP-220	air		Φ50×80	
L3320-10	26.5~40	3000	1.1	10	3	FBP-320	air		L=60	
L3320-50	26.5~40	1500	1.1	30	3	FBP-320	air		Φ40×100	

地址：北京市朝阳区酒仙桥路4号
通信：北京8503信箱14分箱
邮编：100015

电话：010-64383612 传真：010-64362367
Email: zhangqiang.bj@263.net
网址：www.798microwave.com