




## 同轴四端环行器、隔离器

### Coaxial 4 Port Circulator & Isolator

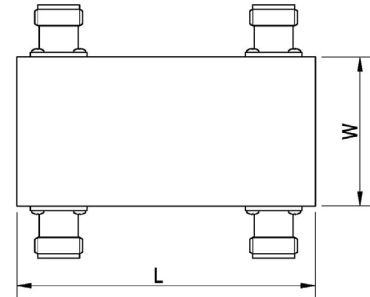

型号 P/N	频率 Frequency GHz	带宽 Bandwidth h MHz	常温性能				驻波系数 V.S.W.R	温度范围 Temperature ℃	平均功率 Mean Power W	峰值功率 Peak Power KW	接头 Connecto r	长×宽×高 L×W×H mm	重量 Weight g
			损耗 Ins.Loss dB		隔离 Isolation dB								
			1-2	2-3	2-1	1-3							
HXD-3B-2	0.06-0.25	15%	0.6	1	20	20	1.2	-30~+60	50		N、SMA	70×140× 32	1020
C218	0.96~1.22		0.5	0.8	20	40	1.2	-40~+70	50	2	N、SMA	70×35×22	270
C219	0.96~1.22		0.3	0.6	20	20	1.2	-40~+70	200	2	N、SMA	100×50× 26	630
SHHT	2~3	300	0.5	0.8	20	40	1.2	-40~+70	10	2	L16	70×35×20	400
C246B	1~1.8	200	0.4	0.8	20	40	1.2	-40~+55	320	6	N	100×70× 40	1200

地址：北京市朝阳区酒仙桥路4号  
通信：北京8503信箱14分箱  
邮编：100015

电话：010-64383612 传真：010-64362367  
Email: zhangqiang.bj@263.net  
网址：www.798microwave.com