



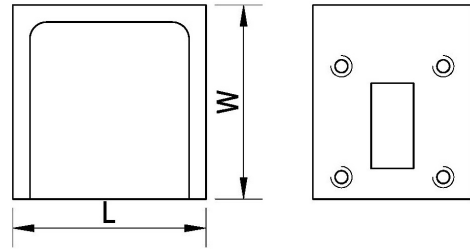

波导环行器

Waveguide
Circulator



型号 P/N	频率 Frequency GHz	带宽 Bandwidth h MHz	常温性能			温度范围 Temperature °C	平均 功率 Mean Power W	峰值 功率 Peak Power KW	法兰盘 型号 flange	L×W×H mm	重量 Weight kg
			损耗 Ins.Loss /dB	隔离 Isolation /dB	驻波系数 V.S.W.R						
C322-1k	2.2~2.55	10%	0.3	20	1.2	-10~+55	1000		FDP-22	183×190	
C326-1k	2.17~3.3	10%	0.3	20	1.2	-10~+55	1000		FDP-26	173×180 ×95.3	5.5
C332	2.8~3.4	15%	0.3	20	1.2	-10~+55			FDP-32	110×150	
C332-250	2.8~3.4	10%	0.3	20	1.2	-10~+55	250		FDP-32	140×150	
C348-100	4.5~6	500	0.3	20	1.2	-10~+55	100		FDP-48	110×115	
C358-100	5~6.5	500	0.3	20	1.2	-10~+55	100		FDP-58	90×101	
C353	5.7~5.9	full	0.25	28	1.08	-10~+55	300		FDP-58	90×95	
C353T	5.7~5.9	full	0.25	28	1.08	-10~+55	1000		FDP-58	110×115 ×90	
C370	5.85~6.45	full	0.3	23	1.15	-10~+55	300		FDP-70	80×85	
C303	5.9~8.3	600	0.2	28	1.08	0~+45			FEP-70	98×99	
HXC-21	5.9~6.4	full	0.2	28	1.06	0~+45			FDP-70	98×98.6	
HXC-22	6.4~7.1	full	0.2	28	1.06	0~+45			FDP-70	100×103.6	
HXX-16	7.1~8.75	full	0.25	28	1.08	0~+45			FDP-84	82×87	
HXX-17	7.1~8.75	full	0.2	28	1.08	0~+45			FBP-84	60×60	
C304	7.4~8.3	full	0.25	28	1.08	0~+45			FDP-84	80×80	
TBH102B	7.8~8.2	full	0.2	28	1.08	5+45			FDP-84	110×69	
TBH102D	7.8~8.2	full	0.2	28	1.08	5+45			FDP-84	110×76	
C384-400	7.5~8.5	full	0.3	20	1.2	-20~+60	400		FBP-84	80×80	
HXX-10	8.2~9	full	0.2	28	1.05	0~+45			FBP-100	48×53	
C3100-300	8.5~10	full	0.3	20	1.2	-40~+60	300		FBP-100	62×62	
C311	10.7~11.7	full	0.25	25	1.12	-10~+55			FBP-120	38×42.5	
HXX-10R	12~12.5	full	0.35	20	1.2	-10~+55			FBP-100	48×53	
C315	13.5~17	800	0.5	20	1.2	-25~+60	20	20	FBP-140	21×525	
C3140-150	13.5~16	500	0.3	20	1.2	-25~+60	150		FBP-140	38.1×39.1	

地址：北京市朝阳区酒仙桥路4号
通信：北京8503信箱14分箱
邮编：100015

电话：010-64383612 传真：010-64362367
Email: zhangqiang.bj@263.net
网址：www.798microwave.com