



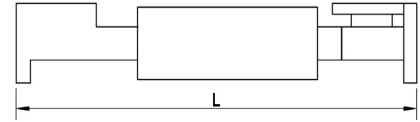

差相移式环行器

High Power Differential Phase Shift Circulator



型号 P/N	频率 Frequency GHz	带宽 Bandwidth MHz	常温性能					温度 范围 Temperature °C	平均 功率 Mean Power W	峰值 功率 Peak Power KW	法兰盘 型号 flange	冷却 方式	L mm	重量 Weight kg
			损耗 Ins.Loss /dB		隔离 Isolation /dB		驻波 系数 V.S.W.R 1/2							
			1→2	2→3	2→1	1→3								
P326	1.8~2.6	15%	0.3	0.3	20	20	1.2	-10~+50	20k	4k	FDM-26	水冷 Water		
P332A	2.6~3.2	10%	0.4	0.4	20	20	1.2	-10~+50	10k	1k	FD/AM-32	水冷 Water	700	
P332B	2.6~3.2	10%	0.4	0.4	20	20	1.2	-10~+50	5k	4k	FD/AM-32	水冷 Water	700	
P351	5~6	10%	0.4	0.4	20	20	1.2	-10~+50	8k	1k	FDM-48	水冷 Water	500	
P384	6.5~8	7%	0.4	0.4	20	20	1.2	-10~+50	250	250	FBP-84		330	
HXX-2	8.5~10	7%	0.5	0.5	20	20	1.2	-25~+60	250	250	FBP-84		255	
P316	14~17	7%	0.5	0.5	20	20	1.2	-25~+60	80	80	FBP-140		165	
P3320	26~40	3%	0.55	0.6	20	20	1.2	-25~+60	60	30	FBP-320		135	